


Vertical Cables with Spring Hooks to Reduce Net Deflection. (One Each Side)

Black Ultra Cross® Knotless Dyneema® Netting or Black #36 Nylon Netting, 4" Square Mesh with Rope Bound Perimeter (Sized as Required per Project Specifications)

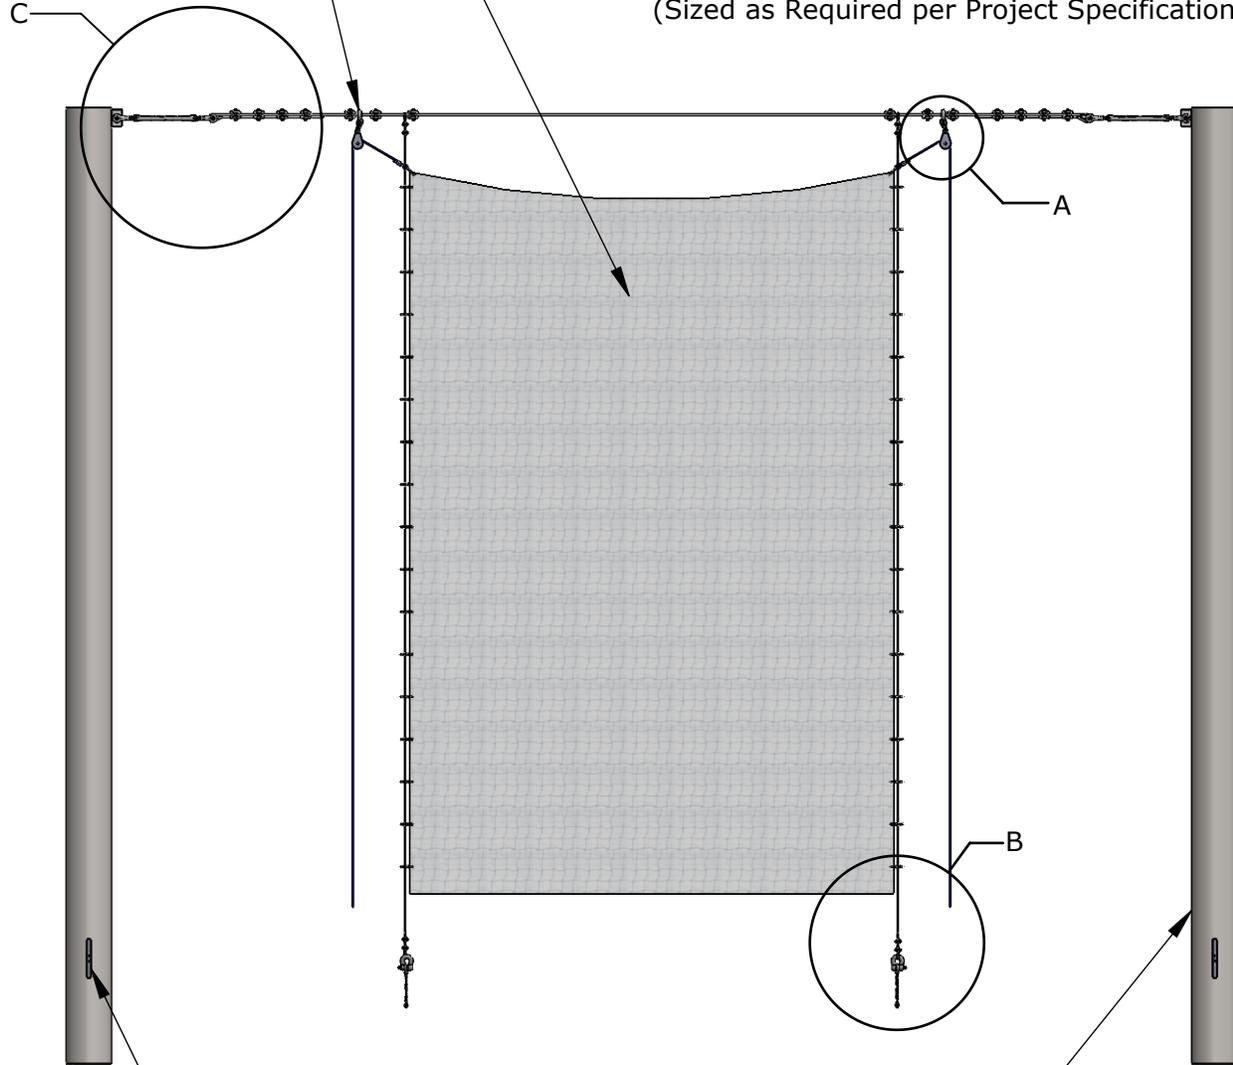

1 Rope Cleat Per Side. (Location to be Determined in the Field by Others)

Pole or Building Structure (By Others)

The net must be lowered to the ground when the wind speed is forecast to exceed 60 mph and/or prior to any extreme wind events. Sportsfield Specialties, Inc. strongly recommends the removal of the net prior to exposure to winter weather, including snow and/or ice storms. Removal/Lowering of the net will mitigate any unforeseen damage to the poles, net and/or attachment hardware. Storing the net in a dry, pest free location will help extend the life of the net. Sportsfield Specialties, Inc. will not be held liable or assume responsibility for any damage to the net, poles and/or corresponding attachment hardware if the net is not removed/lowered prior to the above described wind and/or weather events.

PROPRIETARY AND CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SPORTSFIELD SPECIALTIES INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SPORTSFIELD SPECIALTIES INC. IS PROHIBITED.

Tension Football Safety Netting System

Not To Scale

Sportsfield Specialties Inc 07012025

3/16" Spring Hooks,
 18" Vertical Spacing

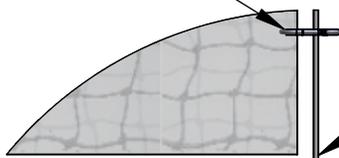

1/4" 7x19 Galvanized Steel
 Wire Rope With Plain Ends,
 7,000 lb. Minimum Break Strength,
 2,333 lb. Minimum Working Load Limit

1/4" Heavy Duty Fist Grip
 Wire Rope Clips,
 Galvanized Steel
 (2 Clips Each End)


1/2" x 6" Galvanized Steel Eyebolt with Shoulder,
 2,200 lbs Working Load Limit,
 Set in HIT-HY200R Hilti
 Epoxy Adhesive (By Others),
 (See Hilti Specifications for Core Diameter, Core
 Depth and Cure Rates)

1/4" Heavy Duty
 Wire Rope Thimble,
 Galvanized Steel
 (1 Thimble Each End)

1/2" Shackle Anchor,
 Galvanized Steel
 (Bottom End Only)

DETAIL B

Heavy Duty Fist Grip
 Wire Rope Clips,
 Galvanized Steel

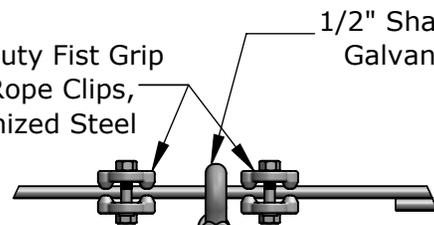

1/2" Shackle Anchor
 Galvanized Steel

5/16" Quick-Clip
 Spring Hook

1/4" Swivel Eye
 Block Pulley

Rope Tether

DETAIL A

Anchor Points
 (By Others)

Galvanized Steel Jaw & Jaw Turnbuckle
 (1 Turnbuckle Each End)



Heavy Duty
 Wire Rope Thimble,
 Galvanized Steel
 (1 Thimble Each End)

Heavy Duty Fist Grip
 Wire Rope Clips,
 Galvanized Steel
 (Both Ends)

Galvanized Steel
 Wire Rope with Plain Ends
 or EverSteel™-X Dyneema®
 12-Strand Single Braid Rope
 with Class II Eye Splice

DETAIL C

Cable and Associated Hardware Sizes are
 Shown for Reference Only. Actual Size and
 Configuration May Vary By Project per Local
 Code Requirements. See Project Specific
 Stamped Drawings.

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN
 THIS DRAWING IS THE SOLE PROPERTY
 OF SPORTSFIELD SPECIALTIES INC.
 ANY REPRODUCTION IN PART OR AS A
 WHOLE WITHOUT THE WRITTEN
 PERMISSION OF SPORTSFIELD
 SPECIALTIES INC. IS PROHIBITED.

Tension Football Safety Netting System

Not To Scale

Sportsfield Specialties Inc 07012025