


- A) PRE-ASSEMBLED DUGOUT ARRIVES ON FLAT BED TRAILER.
- B) DUGOUT GETS CRANED OFF TRAILER AND SET INTO POSITION (CRANE/INSTALL BY OTHERS)
- C) ANCHOR DUGOUT INTO PLACE USING HILTI ANCHORING SYSTEM PROVIDED (SEE 'DETAIL C')

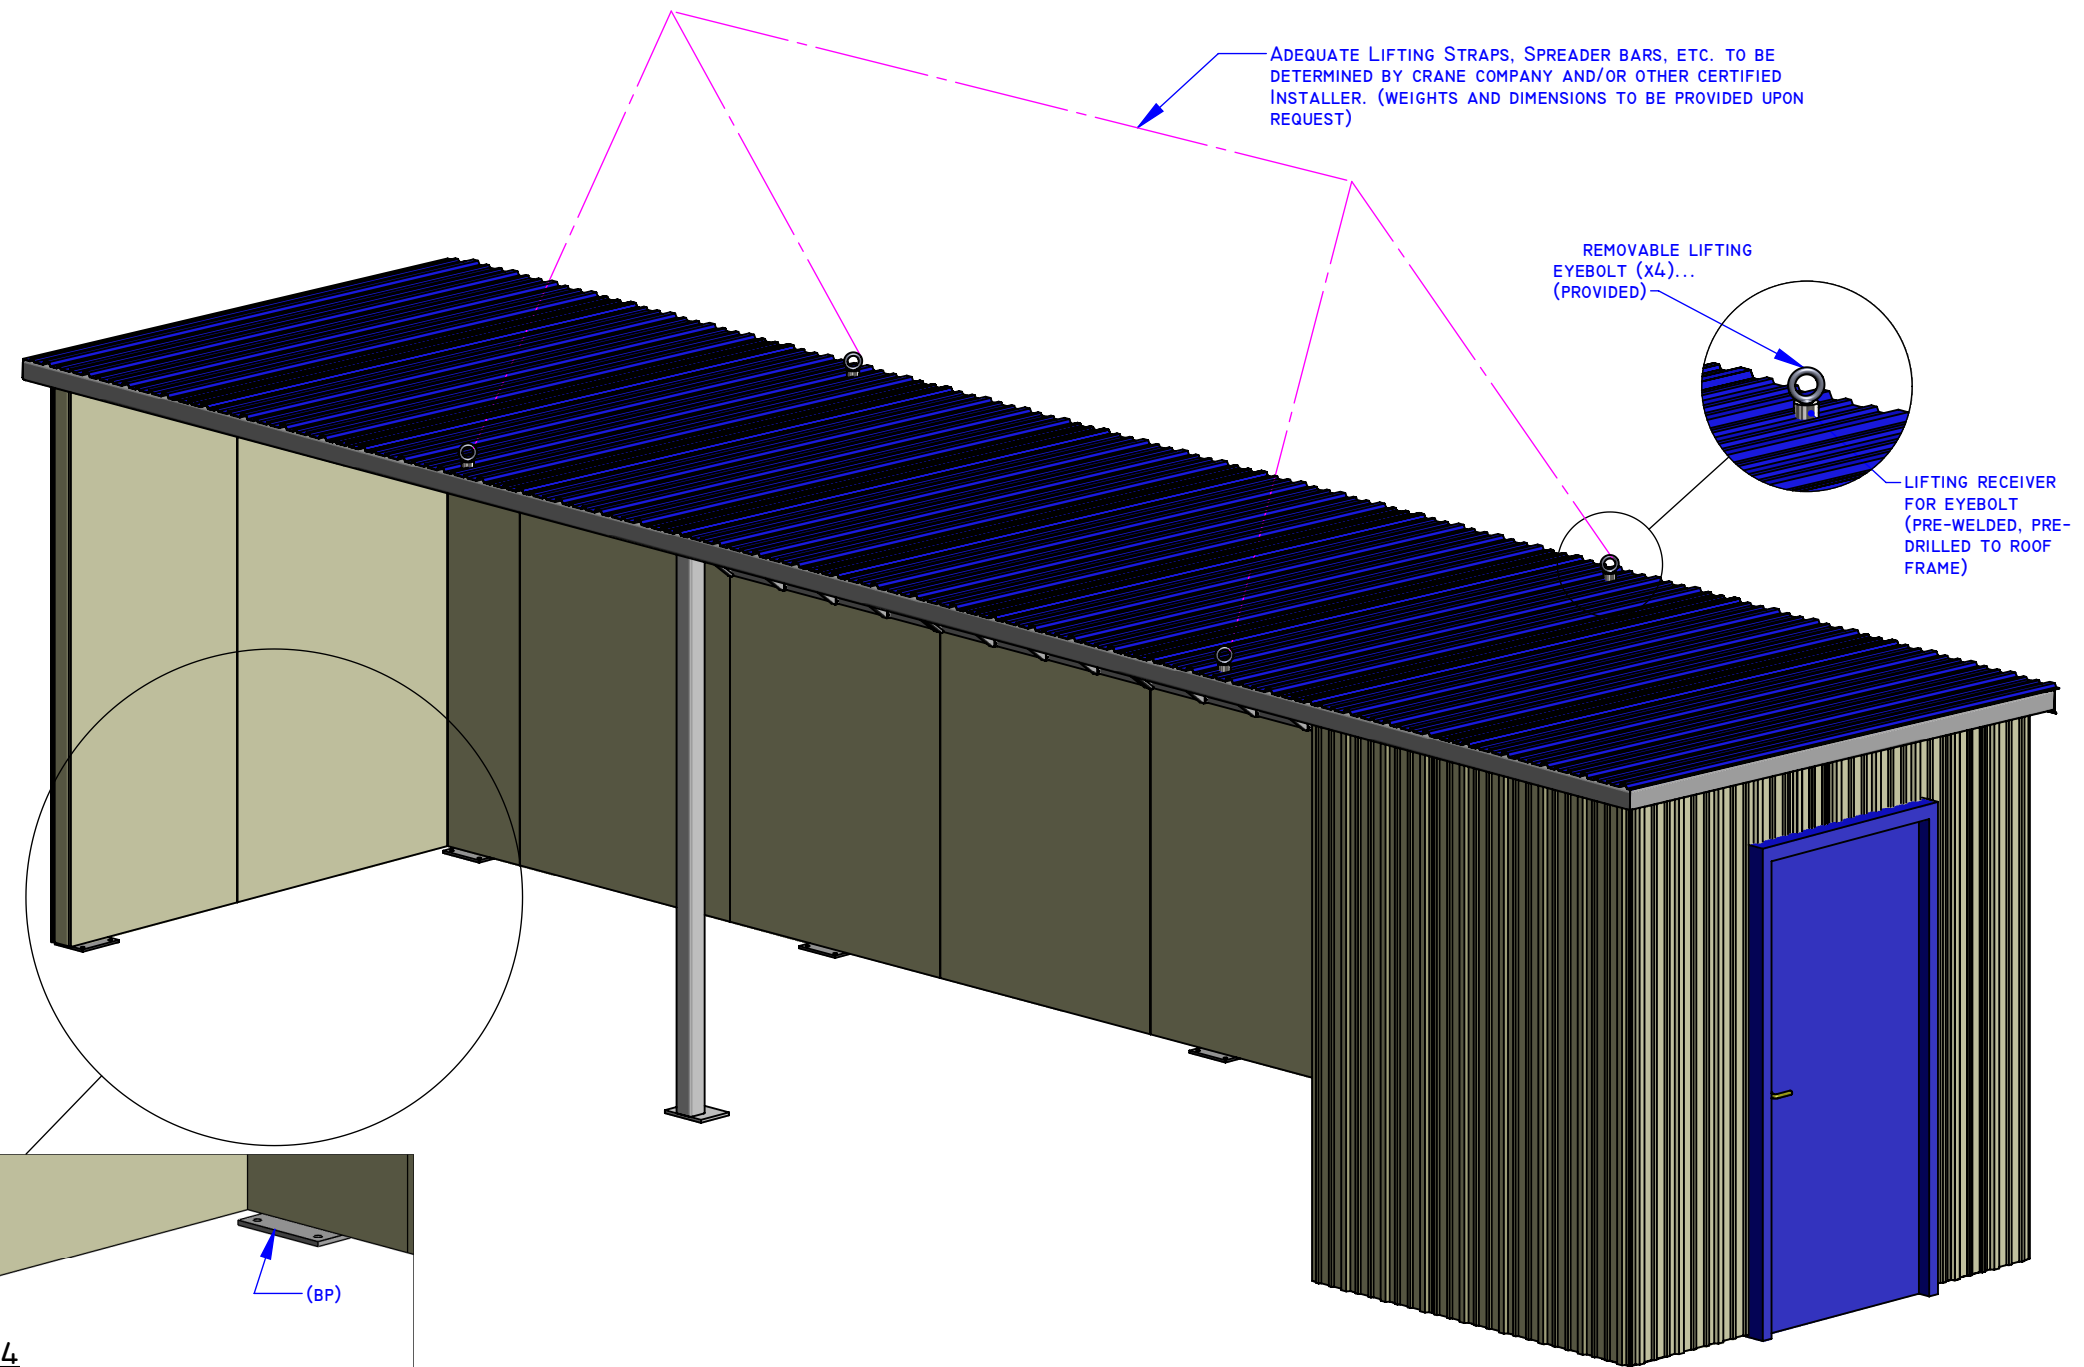

FRACTION	DECIMAL	METRIC
1/64	.0156	.3969
1/32	.0313	.7938
3/64	.0469	1.1906
1/16	.0625	1.5875
5/64	.0781	1.9844
3/32	.0938	2.3813
7/64	.1094	2.7781
1/8	.125	3.1750
9/64	.1406	3.5719
5/32	.1563	3.9688
11/64	.1719	4.3656
3/16	.1875	4.7625
13/64	.2031	5.1594
7/32	.2188	5.5563
15/64	.2344	5.9531
1/4	.250	6.3500
17/64	.2656	6.7469
9/32	.2813	7.1438
19/64	.2969	7.5406
5/16	.3125	7.9375
21/64	.3281	8.3344
11/32	.3438	8.7313
23/64	.3594	9.1281
3/8	.375	9.5250
25/64	.3906	9.9219
13/32	.4063	10.3188
27/64	.4219	10.7156
7/16	.4375	11.1125
29/64	.4531	11.5094
15/32	.4688	11.9063
31/64	.4844	12.3031
1/2	.500	12.7000
33/64	.5156	13.0969
17/32	.5313	13.4938
35/64	.5469	13.8906
9/16	.5625	14.2875
37/64	.5781	14.6844
19/32	.5938	15.0813
39/64	.6094	15.4781
5/8	.6250	15.8750
41/64	.6406	16.2719
21/32	.6563	16.6688
43/64	.6719	17.0656
11/16	.6875	17.4625
45/64	.7031	17.8594
23/32	.7188	18.2563
47/64	.7344	18.6531
3/4	.7500	19.0500
49/64	.7656	19.4469
25/32	.7813	19.8438
51/64	.7969	20.2406
13/16	.8125	20.6375
53/64	.8281	21.0344
27/32	.8438	21.4313
55/64	.8594	21.8281
7/8	.8750	22.2250
57/64	.8906	22.6219
29/32	.9063	23.0188
59/64	.9219	23.4156
15/16	.9375	23.8125
61/64	.9531	24.2094
31/32	.9688	24.6063
63/64	.9844	25.0031

- ONCE DUGOUT IS SET INTO POSITION:
- 1) DRILL DOWN THRU BASE PLATE HOLES INTO CONCRETE (EMBEDMENT IS TYPICALLY AROUND 5")
 - 2) CLEAN OUT HOLES
 - 3) INJECT HILTI ADHESIVE
 - 4) INSERT THREADED ROD
 - 5) TIGHTEN DOWN HEX NUT AND WASHER
- HARDWARE, ADHESIVE & DISPENSER PROVIDED.*
- DRILL BITS AND POWER TOOLS NOT PROVIDED.*
- HILTI INSTALL INSTRUCTIONS WILL BE INCLUDED FOR MORE SPECIFICS.*

PROPRIETARY AND CONFIDENTIAL

This drawing is the confidential property of Sportsfield Specialties, Inc. and is to be used only by authorized personnel and in the interest of Sportsfield Specialties, Inc. It must be accounted for; shall not be reproduced in whole or in part without prior written permission from Sportsfield Specialties, Inc. and must be returned to Sportsfield Specialties, Inc., or stated at any time upon request, but in any event at completion of the work or job. The recipient agrees to keep confidential, and to require his (its) employees to keep confidential, the information contained here on. Disclosure of the information contained hereon shall be made only to those persons who require such information for their work on Sportsfield Specialties, Inc. projects

Sportsfield Specialties, Inc. Delhi, N.Y.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± 1/16 ANGULAR: MACH ± BEND ± TWO PLACE DECIMAL ± .01 THREE PLACE DECIMAL ± .005		DRAWN		
INTERPRET GEOMETRIC TOLERANCING PER:		CHECKED		TITLE:
MATERIAL		ENG APPR.		<h1>Enclosed Dugout Installation Reference</h1>
FINISH		MFG APPR.		
NEXT ASSY	USED ON	Q.A.		SIZE
APPLICATION		COMMENTS:		DWG. NO.
DO NOT SCALE DRAWING				REV
				SCALE: 1:64
				WEIGHT:
				SHEET 1 OF 1

General Information

Cavity Number

Tells which cavity used during multi-cavity production.

Size

Shank diameter in inches.



Lifting Eye Traceability Markings

Forging Code


Identifies equipment used during forging operation.

Heat Code

Refers to specific heat of steel used.

Diamond "D" Logo

Manufacturing trademark of the Edward W. Daniel Company



Application:

(a) Loads should always be applied to lifting eyes in the plane of the eye, not at some angle to this plane.

(b) Shoulder lifting eyes must be properly seated (should bear firmly against the mating part) otherwise the working loads must be reduced substantially. A steel washer or spacer may be required for proper seating.

(c) No greater load should be allowed than that given under rated capacity in each of the tables of dimensional data.

(d) To obtain greatest strength from a lifting eye, it must fit reasonably tight in the hole into which it is screwed to prevent unscrewing due to twist of cable. Tightness and seating must be checked after initial load.

(e) Lifting eyes should never be painted or otherwise coated when used for lifting, as such coatings will very likely cover up flaws.

(f) To attain the rated capacity listed for regular lifting eyes, full thread engagement allowing 1/2 turn for alignment to the plane of the eye is necessary.

Physical Testing:

Each lot of standard lifting eyes is manufactured and tested according to ASTM A489-93 and ANSI B18. 15.

BREAKING STRENGTH: The threaded shank is screwed into one jaw of a testing machine and a pin secured to the other jaw passed through the eye.

BEND TEST: Unthreaded parts must be capable of being bent to pressure or blows through 45° without showing cracks or indications of failure.

TENSILE TEST: Per ASTM A489.

PLAIN & SHOULDER LIFTING EYES

Material Data:

Grade C1030
Heat Treat Quench & Draw

Mechanical Properties:


Grain Size 5 or Finer
Tensile 65,000 psi min.
Yield 30,000 psi min.
Elongation 30% min.
Reduction of Area 60% min.

Diamond "D" Lifting Eyes are processed and tested to the above requirements. Tests are performed on randomly selected lifting eyes from a given heat lot.

LIMITED WARRANTY: See page 36 .

CERTIFICATIONS: Request for certification(s) must be made at time of order entry and there will be a charge associated with the certification.

FORGING TOLERANCES: Tolerances on all forged products is 1/32".

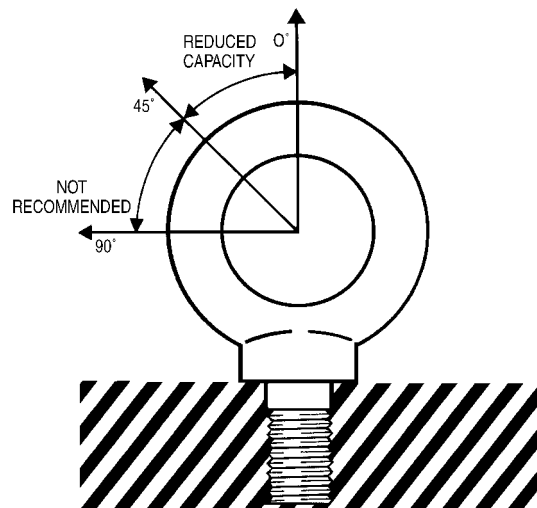

Lifting Eye Capacities

DIAMETER	RATED CAPACITY				over 45°	
	0°		45°			
IN.	MM	LBS.	KGS	LBS.	KGS	
1/4	(M6)	500	(210)	125	(52)	N
5/16	(M7)	900	(370)	225	(92)	O
3/8	(M8)	1,300	(500)	325	(125)	T
7/16	(M10)	1,800	(740)	450	(185)	
1/2	(M12)	2,400	(1,030)	600	(257)	
9/16	(M14)	3,200	(1,600)	800	(400)	
5/8	(M16)	4,000	(1,810)	1,000	(452)	R
3/4	(M18)	5,000	(2,140)	1,250	(535)	E
7/8	(M20)	7,000	(2,860)	1,750	(715)	C
1	(M24)	9,000	(3,850)	2,250	(962)	O
1-1/8	(M27)	12,000	(5,200)	3,000	(1,300)	M
1-1/4	(M30)	15,000	(6,400)	3,750	(1,600)	M
1-1/2	(M36)	21,000	(8,970)	5,250	(2,242)	E
1-3/4	(M45)	28,000	(11,960)	7,000	(2,990)	N
2	(M52)	38,000	(16,230)	9,500	(4,057)	D
2-1/2	(M65)	56,000	(24,200)	14,000	(6,000)	D

(Metric in Parenthesis)

NOTE ON LIFTING EYE & NUT EYE BOLT RATED CAPACITIES
All rated lifting capacities included in the product charts are based on full sized shank and eye unaltered, and unaltered threading.

Lifting Eye Capacities & Safety information

Rated Capacity: The maximum recommended load that should be exerted on the item at zero degree vertical pull. All rated load values are for pulls exerted in the plane of the eye.

Ultimate Strength: As defined in the machinist's handbook is: the stress at which a material in tension, compression, or shear will rupture or fracture.

Yield Strength: The maximum stress that can be applied to a material without permanent deformation of the material.

Safety Factor: An industry term denoting theoretical capability. Lifting eye rated capacity is figured with a 5 to 1 safety factor for a zero degree straight vertical pull

Dimensions in Inches • Weight in Pounds
Please include stock number and size when ordering